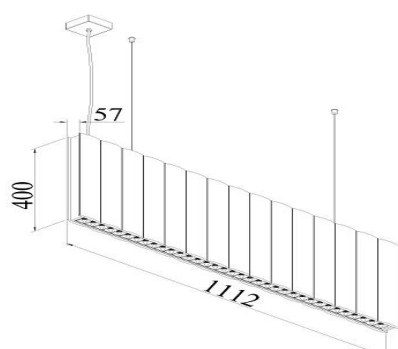
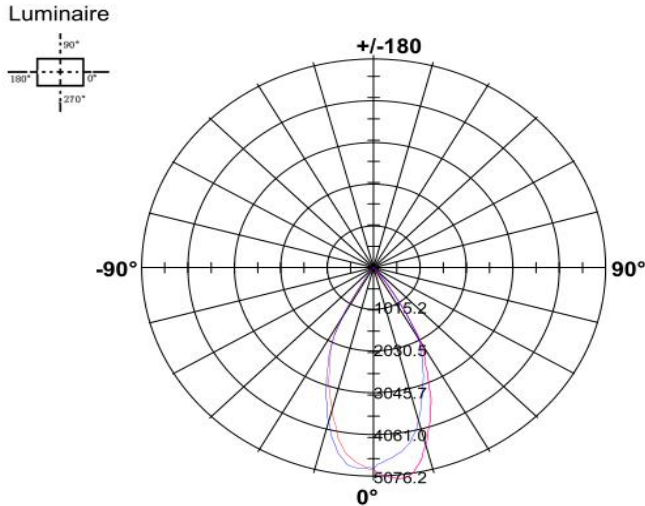


SPECIFICATION

Technical Parameters				Technical chart
Product model	PH-PL-05551-SL	Product Size	1100*55*400mm	Picture
Description	Imported hight-efficiency SMD, CRI≥80, optional CCT3000K/4000K/5700K. Branded electronic accessories with high safty certificate.We have dimmable 0-10v、DALI. Small decline with up to 50000 hrs life.High-efficiency with accurate light dissipation and modularized design which can reduce the later repairing cost.			
Category	Name of parameter	Technical parameters		Line Plot
Power	Input voltage	220-240V		
	Frequency range	50/60Hz		
	Input Power	30. 2W		
	Power Factor	0. 932		
	Power Efficiency	88. 0%		
	Output Voltage	DC 27-54V		
	Output Current	DC 600mA±5%		
	Working Temperature	-20℃~+50℃		
	Dimmabledriver or NOT	NOT		
Lighting source	Model	OSRAM 3030		Light distribution Light Distribution Curve [Unit: cd] 
	IF	150mA		
	VF	6. 0V		
	Power	1W		
	Ra	Ra>80		
	Luminous Flux	130-140lm		
	CCT	3000/4000/5700K		
	Light Power	26. 5W		
	Working temperature	-25℃~+40℃		
Optical parameter	Beam angle	49°		
	Lm/W	103		
	luminous flux	3097		
	UGR	< 18. 0		
Electric standar ds	Insulation class	CLASS I		
	IP Grade	IP 20		
	Certification	CE, CCC, SAA		
other	(G.W. / N.W.)	3. 5/4. 0kg		
	Packaging	120*10. 5*45cm		

Zhongshan Pinghao Lighting Technology Co.,Ltd

Add: 3A Floor, E Block, NO.368, East Bank North Road, Guzhen Town, Zhongshan City, Guangdong, China

TEL: +86 760 22316868

FAX: +86 760 22316878

Website: www.pinghao.com