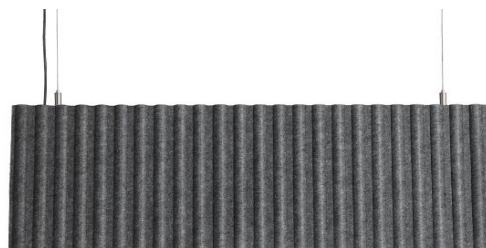

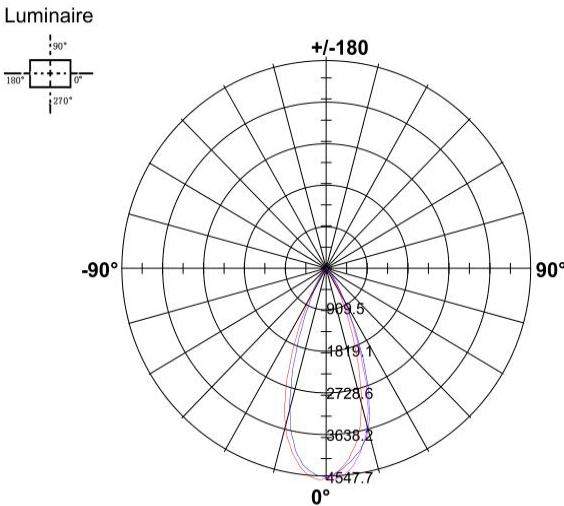


SPECIFICATION

Technical Parameters				Technical chart
Product model	PH-PL-36821-SL	Product Size	1078*36.8*400mm	Picture
Description	Imported hight-efficiency SMD, CRI≥80, optional CCT3000K/4000K/5700K. Branded electronic accessories with high safty certificate.We have dimmable 0-10v、 DALI. Small decline with up to 50000 hrs life.High-efficiency with accurate light dissipation and modularized design which can reduce the later repairing cost.			
Category	Name of parameter	Technical parameters		Line Plot
Power	Input voltage	220-240V		Size: L 1078*W36.8*H400MM 
	Frequency range	50/60Hz		
	Input Power	29.7W		
	Power Factor	0.972		
	Power Efficiency	88.0%		
	Output Voltage	DC 27-54V		
	Output Current	DC 700mA±5%		
	Working Temperature	-20℃~+50℃		
	Dimmabledriver or NOT	NOT		
Lighting source	Model	CREE XPE2		Light distribution Light Distribution Curve [Unit: cd] 
	IF	350mA		
	VF	3.0V		
	Power	1-3W		
	Ra	Ra>80		
	Luminous Flux	114-122lm		
	CCT	3000/4000/5700K		
	Light Power	26W		
	Working temperature	-25℃~+40℃		
Optical parameter	Beam angle	40°		
	Lm/W	75		
	luminous flux	2227		
	UGR	< 18.0		
Electrical standards	Insulation class	CLASS II		
	IP Grade	IP 20		
	Certification	CE, CCC, SAA		
other	(G.W. / N.W.)	3.0/3.5kg		
	Packaging	120*9*45cm		

Zhongshan Pinghao Lighting Technology Co.,Ltd

Add: 3A Floor, E Block, NO.368, East Bank North Road, Guzhen Town, Zhongshan City, Guangdong, China

TEL: +86 760 22316868

FAX: +86 760 22316878

Website: www.pinghao.com