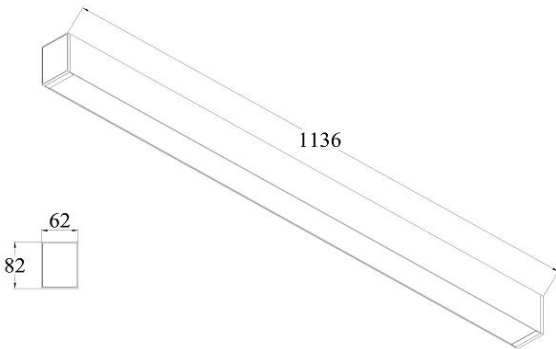
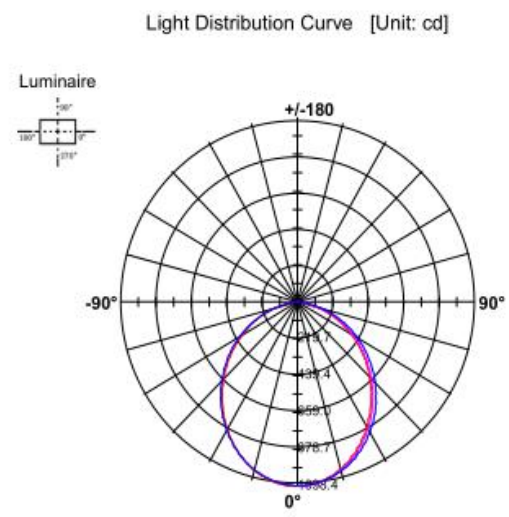


SPECIFICATION

Technical parameters				Technical chart
Product model	PH-ZB-06211-SL	Product Size	1136*62*82MM	Picture
Description	Imported hight-efficiency SMD, CRI≥80, optional CCT3000K/4000K/5700K. Branded electronic accessories with high safty certificate.We have dimmable 0-10v、DALI. Small decline with up to 50000 hrs life.High-efficiency with accurate light dissipation and modularized design which can reduce the later repairing cost.			
Category	Name of parameter	Technical parameters		Line Plot
Power	Input voltage	220~240V		
	Frequency range	50/60Hz		
	Input Power	28.9W		
	Power Factor	0.97		
	Power Efficiency	88.0%		
	Output Voltage	DC 27~54V		
	Output Current	DC 700mA±5%		
	Working Temperature	-20℃~+50℃		
	Dimmabledriver or NOT	YES		
Lighting source	Model	SAMSUNG 2835		Light distribution
	IF	60mA		
	VF	3.0V		
	Power	0.2W		
	Ra	Ra>80		
	Luminous Flux	26~28lm		
	CCT	3000/4000/5700K		
	Light Power	25W		
	Working temperature	-25℃~+40℃		
Optical parameter	Beam angle	101.5°		
	Lm/W	96		
	luminous flux	2780		
	UGR	<19.0		
Electrical standards	Insulation class	CLASS I		
	IP Grade	IP 20		
	Certification	CE, CCC, SAA		
other	(G.W. / N.W.)	3.2/3.7kg		
	Packaging Size	123*10.5*13.5cm		

Zhongshan Pinghao Lighting Technology Co.,Ltd

Add: 3A Floor, E Block, NO.368, East Bank North Road, Guzhen Town, Zhongshan City, Guangdong, China

TEL: +86 760 22316868

FAX: +86 760 22316878

Website: www.pinghao.com